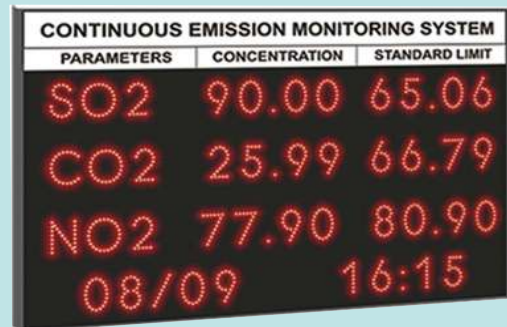


SCROLLING LED GATE DISPLAY

CONTINUOUS EMISSION MONITORING SYSTEM		
PARAMETERS	CONCENTRATION	STANDARD LIMIT
SO2	90.00	65.06
CO2	25.99	66.79
NO2	77.90	80.90
08/09	16:15	

MODEL-UT1820**MODEL-UT1830**

Input Can Connect :- RS-485, Ethernet, 232, RS-485, 4- 20 mA, 0- 10 V DC or Any Special

FEATURE

- ✦ Large Display With Different Size Available.
- ✦ Display To Different Parameter With Parameter Unit And Limits
- ✦ Hanging /rack/wall/panel Mounting Options With IP Protection.
- ✦ Scrolling Type High - Bright Day Light Display Indication With Red Green Or Orange Colour Font.
- ✦ Modbus RTU Multi Drop RS-485 Serial Communication For PLC, SCADA Etc.
- ✦ Direct Server Connectivity From PCB (Pollution Controls Board)
- ✦ Also Connect With Third Party Software(SCADA / PLC).
- ✦ Local Programing Facility For Real Time With Battery Backup.
- ✦ Brick/wall Mounting And Panel Mounting Enclosure With IP Protection.
- ✦ Optional GSM Mobile Connectivity.
- ✦ Programmable Device Address, Baud Rate, Parity And Stop Bit.