
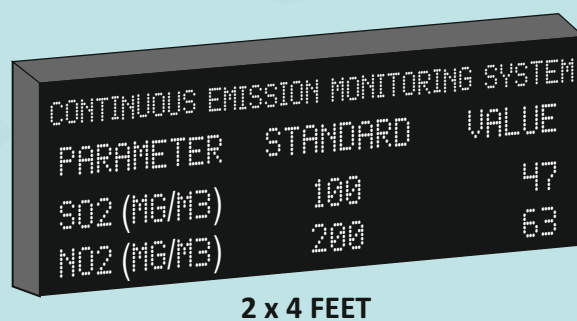
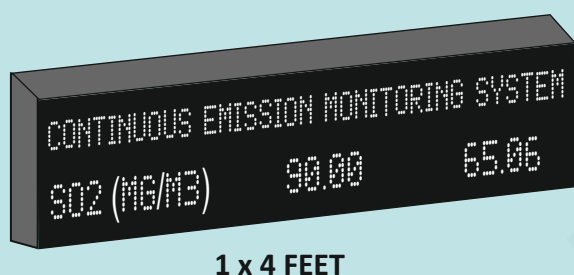
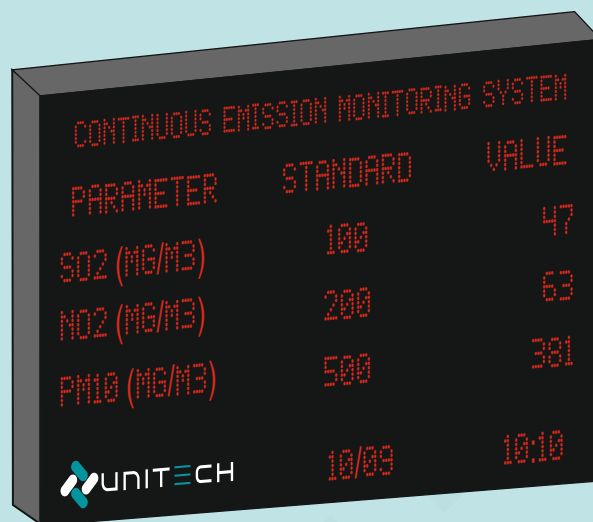


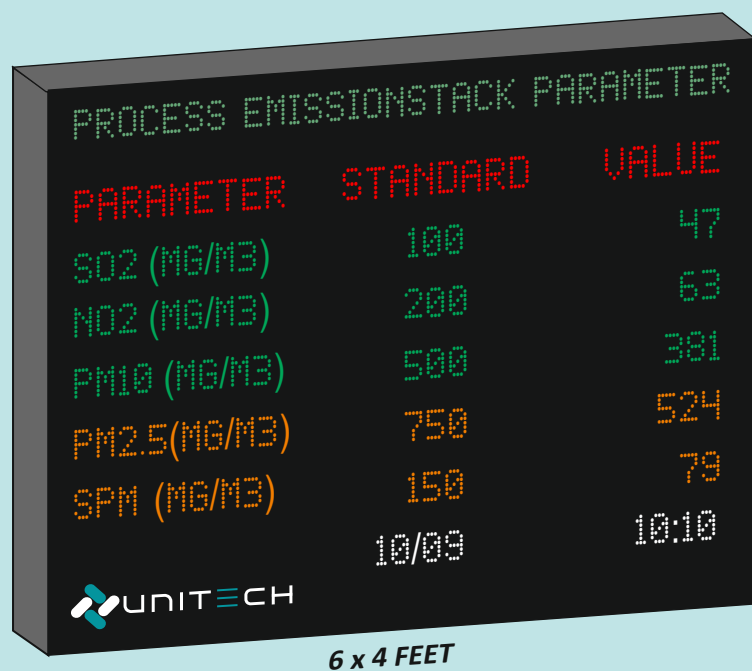


Input Can Connect :- RS-485, Ethernet, 232, RS-485, 4- 20 mA, 0- 10 V DC or Any Special

FEATURE


- ★ Large Display With Different Sizes Available : 6 x 4, 3.5x4, 2 x 4, 1 x 4 Feet Option available.
- ★ Display To Different Parameter With Parameter Unit And Limits
- ★ Hanging /rack/wall/panel Mounting Options With IP Protection.
- ★ Scrolling Type High - Bright Day Light Display Indication With Red Green Or Orange Colour Font.
- ★ Modbus RTU Multi Dop RS-485 Serial Communication or PLC, SCADA Etc.
- ★ Direct Server Connectivity with CPCB (Central Pollution Controls Board) & SPCB (State Pollution Control Board). - Future Expansion is also available.
- ★ Local Programming Facility For Real Time.
- ★ Brick/wall Mounting And Panel Mounting Enclosure with IP Protection.
- ★ Optional GSM Mobile Connectivity.
- ★ To Display any Other Extra Parameter it can also Update from Web Based Utility Throughout the Plant.

Wired Network

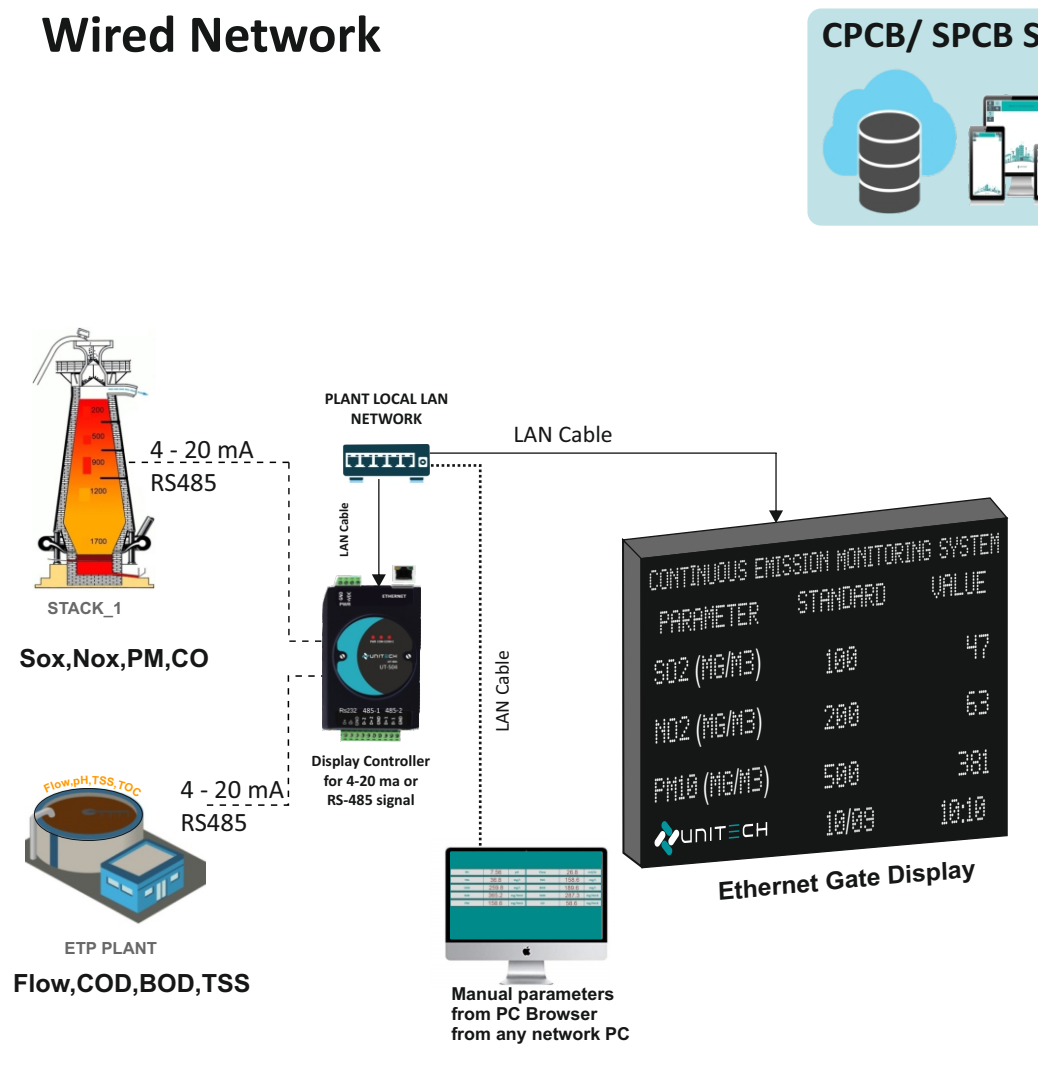

LAN NETWORK TOPOLOGY

Wireless Network

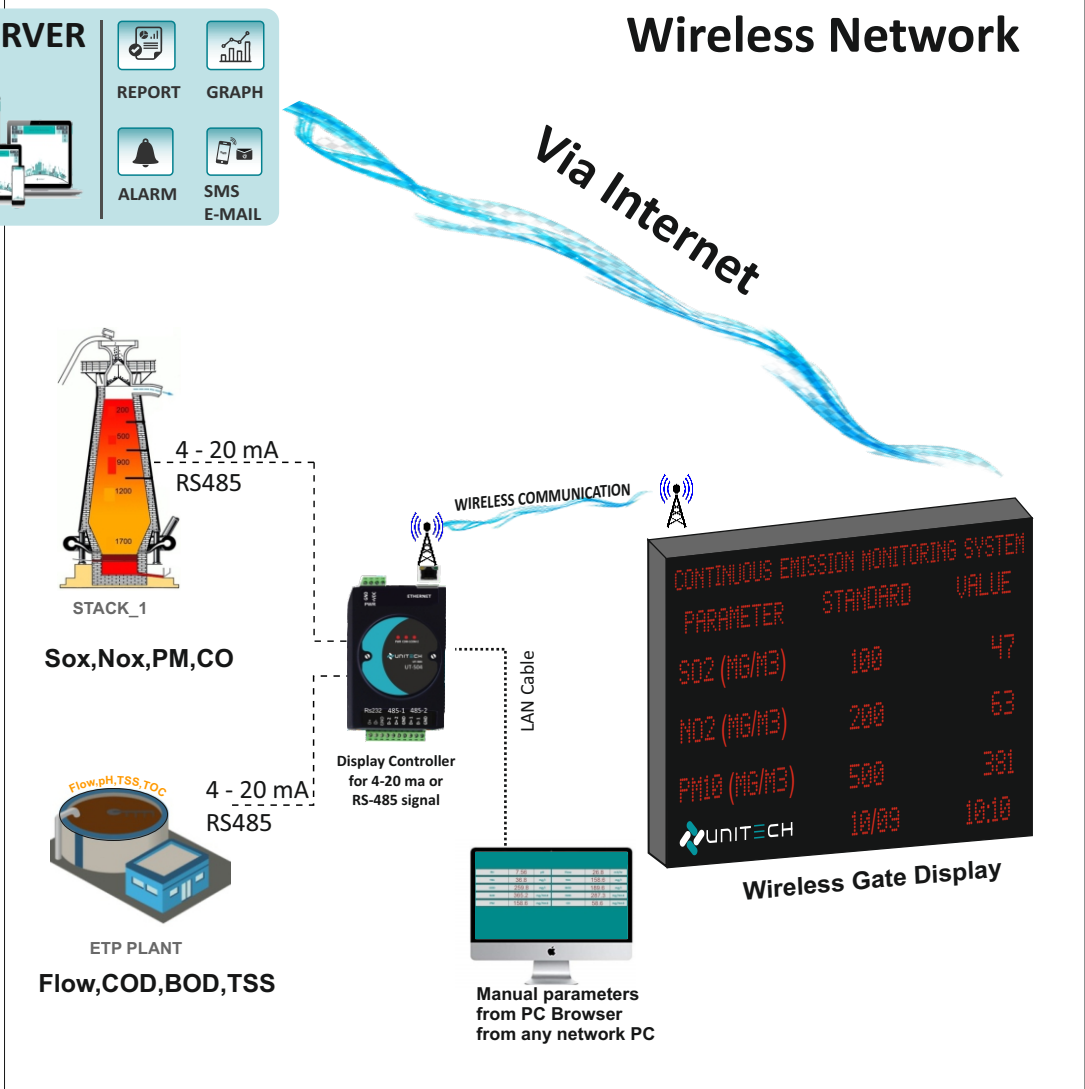

WIRELESS NETWORK TOPOLOGY